


# E50 II


## Quick Start Guide

### 1. Get to know your DAC

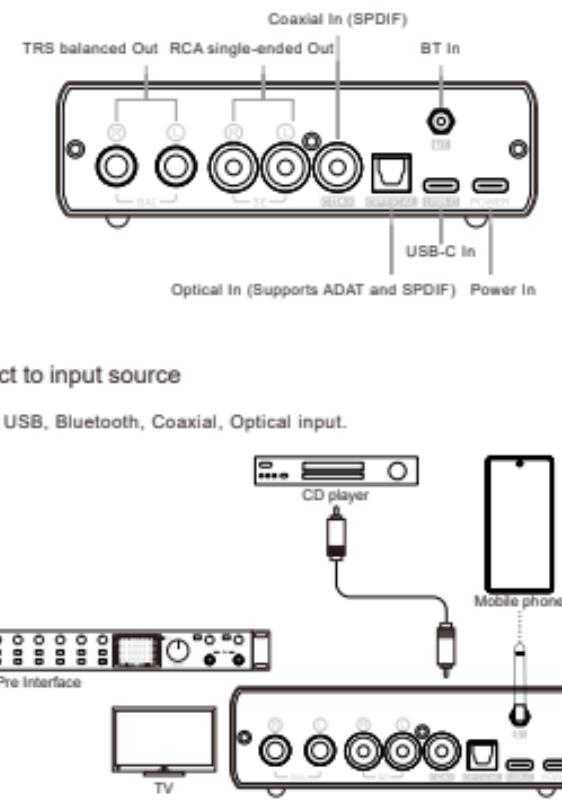


### 2. Connect to input source

Support USB, Bluetooth, Coaxial, Optical input.

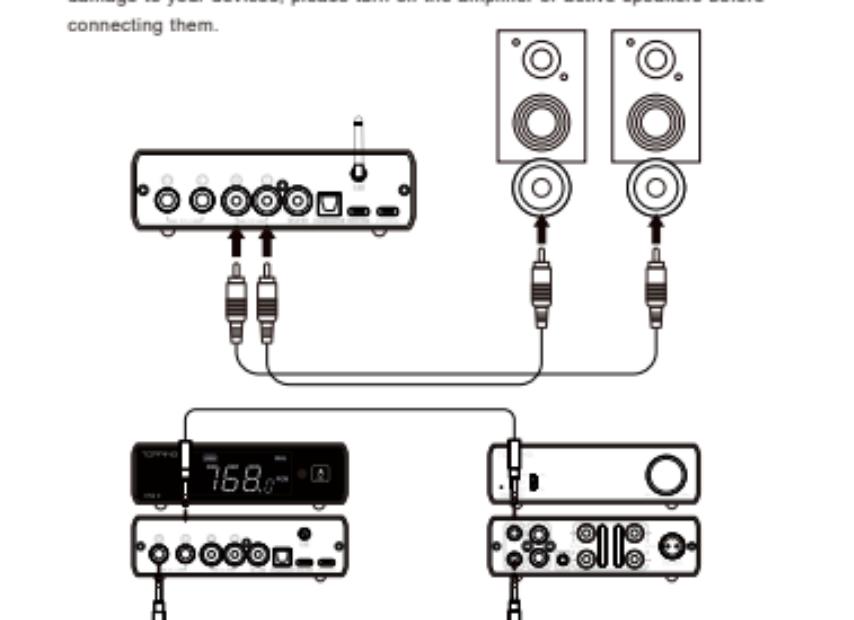


### 3. Connect to amplifier or active speakers

Use TRS or RCA cables to connect to amplifier or active speakers. In order to avoid damage to your devices, please turn off the amplifier or active speakers before connecting them.

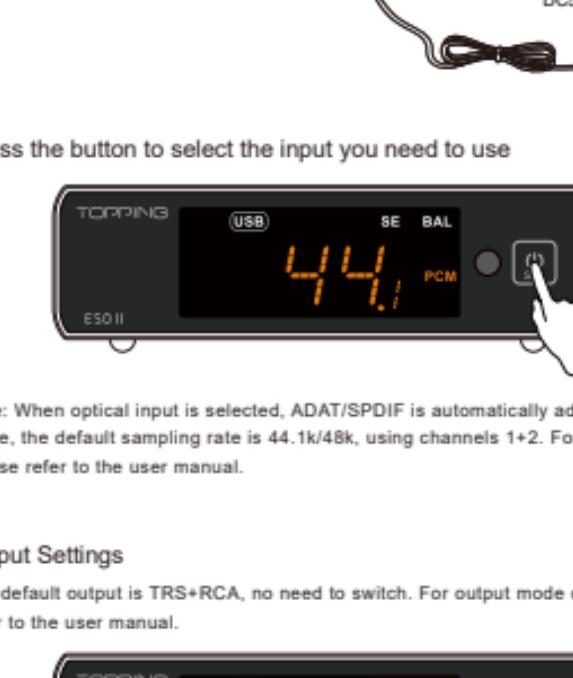

### 4. Connect the power supply and then turn on the device

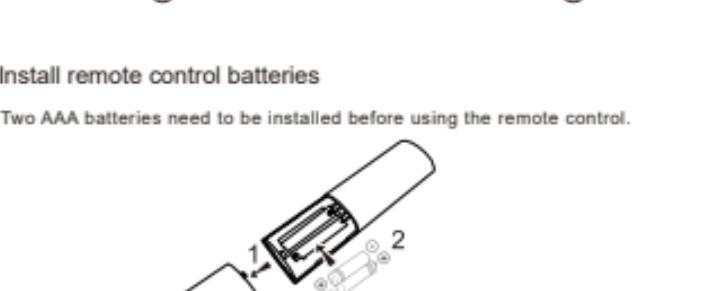

### 5. Press the button to select the input you need to use



Note: When optical input is selected, ADAT/SPDIF is automatically adapted. In ADAT mode, the default sampling rate is 44.1k/48k, using channels 1+2. For detailed settings, please refer to the user manual.

### 6. Output Settings

The default output is TRS+RCA, no need to switch. For output mode changes, please refer to the user manual.



### 7. Install remote control batteries

Two AAA batteries need to be installed before using the remote control.



### 8. Turn down the volume



### 9. Play music and adjust the volume

