

HYNOTONE


CAB105

产品说明书

连 接

可以连接到后级单块，箱头或组合音箱的SPEAKER OUT。

若上述设备为电子管类型，需连接到4 ohm的SPEAKER OUT。

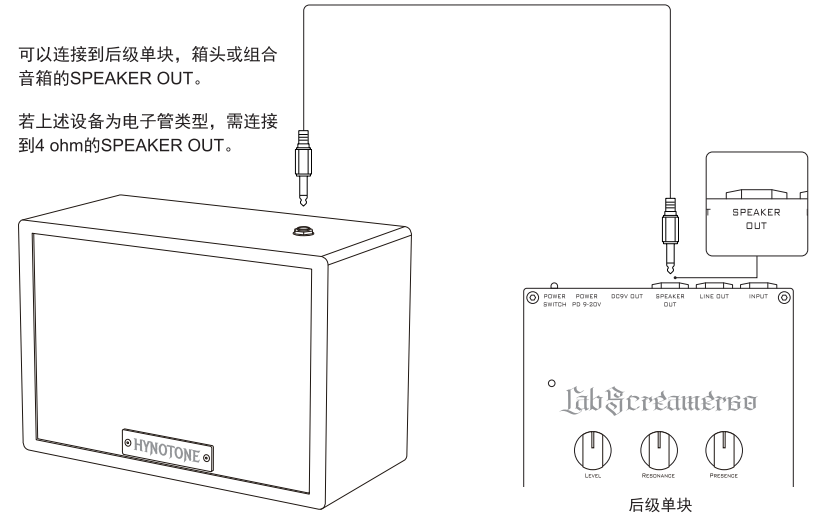

注意事项

- 请使用正确的电源连接所有设备，不使用或雷雨天气请拔下电源。
- 为避免错误操作，请在进行任何连接前调低音量并关闭所有设备电源。
- 不得将本机搁置在高温、潮湿的环境，更不得淋雨或者受强烈冲击。
- 不得随意拆开机壳，如需维修应请专业维修人员处理。
- 对因产品的故障而直接或间接引起的任何损失或损坏不予负责。
- 因产品改进，规格及功能若有变动恕不另行通知。

参 数

尺 寸	250mm * 120mm * 174mm	重 量	2.155Kg
输入接口	6.35mm TS接口	输入阻抗	4 ohm
喇叭尺寸	5寸	功 率	50W


合格证
QC PASS

HYNOTONE

CAB105

User Manual

Connection

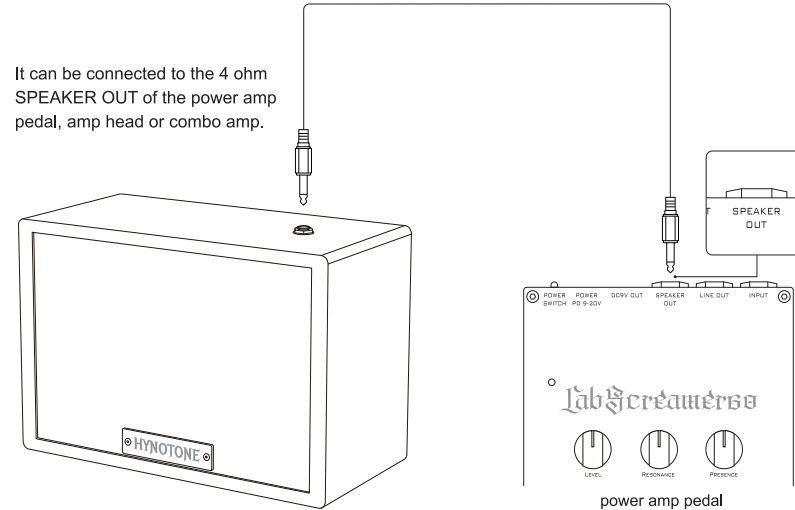

Precautions

- Please use a proper power supply for all your connections, and unplug the power supply when not in use or during thunderstorms.
- To avoid incorrect operation, please lower the volume and turn off all devices before making any connections.
- Do not keep the unit in a hot, humid environment or hit the unit strongly.
- Opening the case instantly voids the warranty!
- Topping accepts no liability for any loss or damage arising directly or indirectly from the failure of CAB105.
- For improvement purpose, specifications subject to changes without prior notice.

Specifications

Measured	250mm * 120mm * 174mm	Weight	2.155Kg
Input	6.35mm TS	Input impedance	4 ohm
Driver size	5 "	Power	50W